
¢ OF THE ROAD (LANE LINE) 6" (MIN.) EXIST. HMA SURF. ±5" EXIST. P.C.C.

MILLING DETAIL

PAVING DETAILS


DETAIL 'A' (TYPICAL)

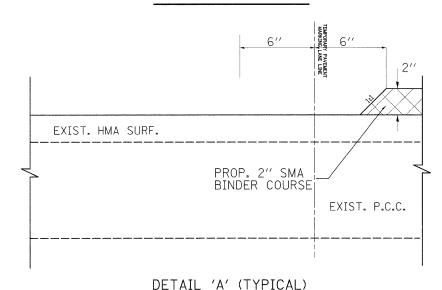


LEGEND FOR DETAILS A, B, C & D


- (1) PROPOSED HOT-MIX ASPHALT SURFACE REMOVAL, 2"
- 2) PROPOSED EPOXY PAVEMENT MARKING, LINE 5"
- 3 PROPOSED SMA SURFACE COURSE, 2"
- 4 PROPOSED THERMOPLASTIC PAVEMENT MARKING, LINE 4"
- 5 PROPOSED RUMBLE STRIP ON SHOULDER
- 6 PERFORMED PLASTIC PAVEMENT MARKING, TYPE B-INLAID-LINE 5"

PAVING DETAILS



DETAIL 'B' (TYPICAL)





DETAIL 'D' (TYPICAL)

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

	·		
40.0000	IL. ROUTE 55	F.A. I RTE.	SECTION
	SUGGESTED SEQUENCE OF OPERATIONS, DETAILS & GENERAL	55	99 (1&2) RS-11
	NOTES-TRAFFIC CONTROL		
1	SCALE: SHEET NO. 1 OF 1 SHEETS STA. TO STA.		TILI TNOTE EED

GENERAL NOTES - TRAFFIC CONTROL

- 1. THE CONTRACTOR SHALL PLACE AND MAINTAIN DRUMS WITH MONO-DIRECTIONAL STEADY BURNING LIGHTS AT 100-F00T c-c ON THE SHOULDER ADJACENT TO MILLED AREAS. DRUMS WILL REMAIN IN PLACE UNTIL THE PROPOSED SURFACE HAS BEEN PLACED AND EDGE LINES HAVE BEEN INSTALLED.
- 2. AT THE END OF EACH NIGHTLY SHIFT, THE CONTRACTOR SHALL SWEEP THE PAVEMENT SURFACE CLEAN, PLACE TEMPORARY PAVEMENT MARKING AND REMOVE TRAFFIC CONTROL FOR LANE CLOSURE.
- 3. THE MILLING REQUIRED TO PLACE A TAPER BETWEEN LANES (SEE DETAILS A, B AND C) WILL BE INCLUDED IN THE COST OF HOT-MIX ASPHALT SURFACE REMOVAL 4".
- 4. GRADE DIFFERENTIAL BETWEEN PAVED LANES SHALL NOT EXCEED 2".

COUNTY TOTAL SHEE NO.

CONTRACT NO. 60153

WILL 45 9